



KWC

KWC

KWC
BEVO



A MINIMALIST CLASSIC

How can tangible values such as longevity, precision, and functionality be combined with classic elegance? KWC BEVO provides the answer: it takes a lot of attention to detail. This is evident at first sight – thanks to its slender silhouette, classically shaped spout, and unmistakable lever design. And it is perceptible in everyday use, too – thanks to top-class materials and high-tech workmanship.



The basalt grey cap cleverly accentuates the weightlessness of the fitting, giving the lever a floating appearance.



The lift is discreetly mounted on the back of the fitting – exactly where you would expect to find it. And it is as effortless to use as it is intuitive to find.



The aerator is practical, splash-free, and reduces water and energy costs. It is discreetly integrated and can be replaced without specialized tools.

TREPLUS



The Innovative Platform

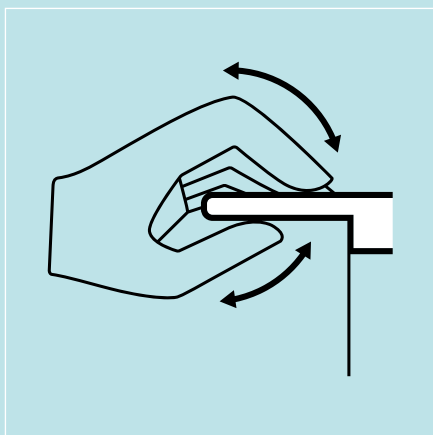
The new KWC BEVO shines bright, mostly with inner values: TREPLUS is the innovative new platform that forms the basis for the entire faucet. The KWC cartridge M 35 OP is the key component with its millionfold proven ceramic disc technology: as hard as diamond and resistant to calcium, ceramic discs permit light and easy use, and incomparable longevity.

- **Intuitive, simple maintenance**
- **Modern, slim design**
- **Fast, secure installation**
- **Complies with and exceeds national and international standards in terms of safety, drinking water hygiene, and health**
- **Exquisite quality of material and workmanship of individual parts**

Cartridge

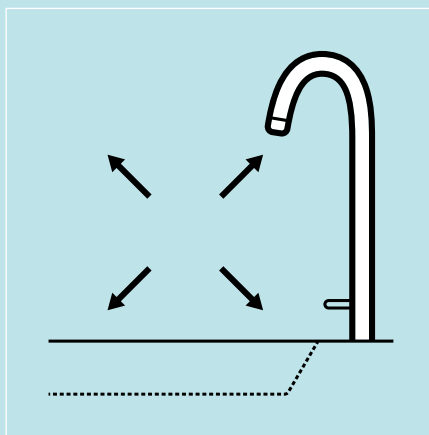
The new KWC cartridge takes comfort to a new level: operation feels even more pleasant and natural. In addition, it permits an extremely precise and individual setting of water quantity and temperature. Even for the installer, the handling has never been so simple and comfortable.

KWC +



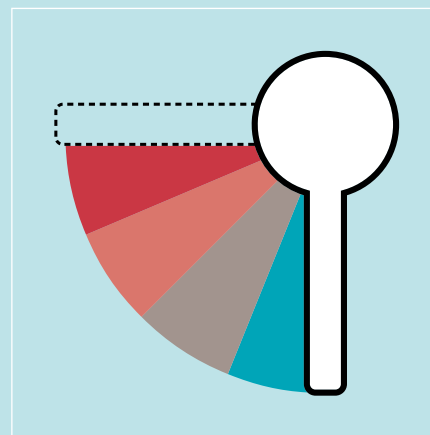
UniqueLever

Innovative lever designs that allow for natural and intuitive use: UniqueLever features innovative KWC design – elegance and precision that you can not only see, but also feel every day.



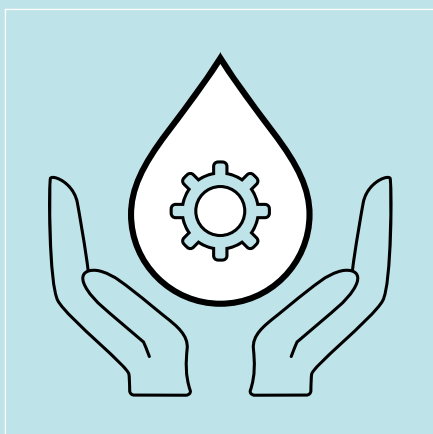
OptimalSpace

Practical yet elegant ergonomic design: OptimalSpace features long, tall spouts that provide ample space for washing and working.



CoolFix

Intelligent and efficient resource usage: With CoolFix, when the lever is in the center – the most common position – the water runs cold. Only when the lever is turned to the left, the water runs warm.



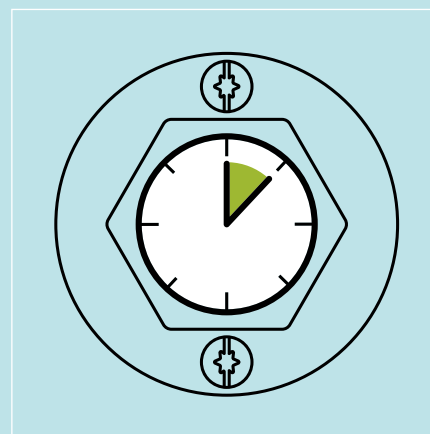
HealthProtect

Better hygiene and unchanged water quality: HealthProtect highlights the strict standards we set ourselves to ensure that our faucets do not affect the taste and smell of your water – that is why we use high-quality materials (metals, plastics) that are ideally suited for contact with water.



GlacierFinish

Robust surfaces and high-quality craftsmanship: GlacierFinish is equipped with durable surfaces that are exceptionally robust and feature an attractive polished shine that you can enjoy for years to come.

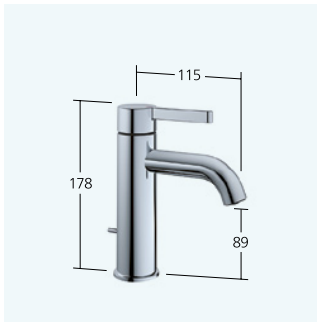


QuickInstallation

Hassle-free positioning and fastening of the threaded connection for quick and easy installation: the locking nut is screwed into place by hand to hold the faucet in position using QuickInstallation, before it is fixed in place via the two locking screws.







Basin
 Lever mixer
 – EcoProtect - water-saving device
 – Fixed spout
 – flow rate and temperature continuously variable
 – temperature limitation

12.421.041.000FL all chrome A 115 with pop-up valve
12.421.051.000FL all chrome A 115 without pop-up valve



Basin
 Lever mixer
 – CoolFix - cold water flow with a centered lever
 – EcoProtect - water-saving device
 – Fixed spout
 – flow rate and temperature continuously variable
 – temperature limitation

12.421.031.000FL all chrome A 115 with pop-up valve
12.421.071.000FL all chrome A 115 without pop-up valve



Basin
 Lever mixer
 – EcoProtect - water-saving device
 – Fixed spout
 – OptimalSpace - ample space for washing or working
 – flow rate and temperature continuously variable
 – temperature limitation

12.421.042.000FL all chrome A 140 with pop-up valve
12.421.052.000FL all chrome A 140 without pop-up valve



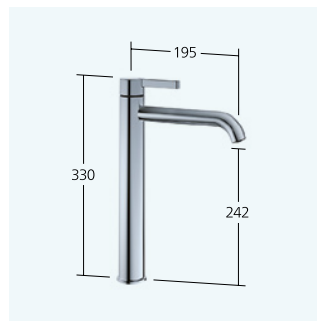
Basin
 Lever mixer
 – CoolFix - cold water flow with a centered lever
 – EcoProtect - water-saving device
 – Fixed spout
 – OptimalSpace - ample space for washing or working
 – flow rate and temperature continuously variable
 – temperature limitation

12.421.032.000FL all chrome A 140 with pop-up valve
12.421.072.000FL all chrome A 140 without pop-up valve



Basin
 Lever mixer
 – Lever installation only possible on the right side
 – EcoProtect - water-saving device
 – Swivel spout 120°, extensible to 360°
 – OptimalSpace - ample space for washing or working
 – flow rate and temperature continuously variable

12.421.132.000FL all chrome A 160 with pop-up valve
12.421.142.000FL all chrome A 160 without pop-up valve



Basin
 Lever mixer
 – For top-mounted basins
 – EcoProtect - water-saving device
 – Fixed spout
 – OptimalSpace - ample space for washing or working
 – flow rate and temperature continuously variable
 – temperature limitation

12.421.093.000FL all chrome A 195 without pop-up valve



Basin
 Lever mixer
 – Fixed spout
 – flow rate and temperature continuously variable
 – temperature limitation

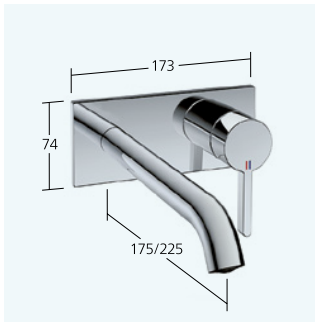
13.421.041.000FL all chrome A 115 with pop-up valve



Freestanding
 Lever mixer
 – For freestanding tub
 – Fixed spout
 – flow rate and temperature continuously variable
 – Scope of delivery:
 – Hand shower KWC FIT-X 26.000.103.000
 – Shower hose 1500 mm, metal
 – To be ordered separately:
 – Unit for concealed installation 39.000.602.931

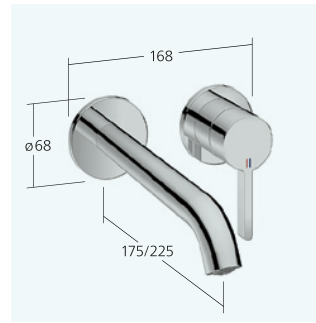
20.421.093.000 all chrome A 215

The product range, models and technical details are subject to change. Dimensions are given in mm.

**Basin**

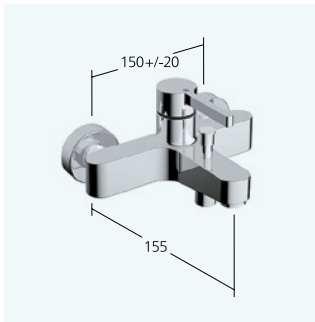
Trim kit lever mixer

- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- temperature limitation
- To be ordered separately:
 - Unit for concealed installation 1/2" 39.001.401.931

11.422.033.000 all chrome A 175**11.422.034.000** all chrome A 225**Basin**

Trim kit lever mixer

- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- temperature limitation
- To be ordered separately:
 - Unit for concealed installation 1/2" 39.001.401.931

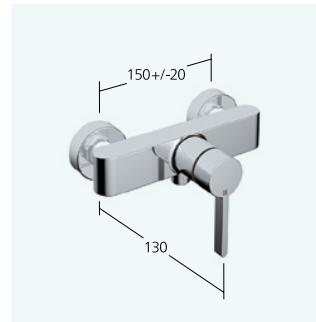
11.422.063.000 all chrome A 175**11.422.064.000** all chrome A 225**Tub**

Lever mixer

- Diverter with automatic reset
- Intrinsicly safe against backflow
- Fixed spout
- flow rate and temperature continuously variable
- temperature limitation
- Wall connections 1/2" x 3/4", without shut-off valve eccentric 10 mm

20.422.333.000

all chrome AD 150 +/- 20 mm, A 155 without spray head, hose, and holder

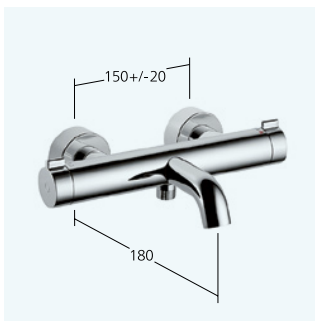
**Shower**

Lever mixer

- Intrinsicly safe against backflow
- flow rate and temperature continuously variable
- temperature limitation
- Wall connections 1/2" x 3/4", without shut-off valve eccentric 10 mm

21.422.330.000

all chrome AD 150 +/- 20 mm without hand shower and hose

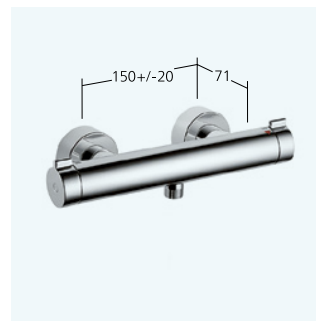
**Tub**

Thermostat style

- EcoProtect - water-saving device
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- SkinProtect - Safety stop prevents scalding
- Turning handle to control flow and for diverter
- Intrinsicly safe against backflow
- Fixed spout
- Thermostatic precision control unit
- constant water temperature (even when mains pressure fluctuates)
- fast response
- Wall connections 1/2" x 3/4", without shut-off valve eccentric 10 mm

26.009.533.000

all chrome AD 150 +/- 20 mm, A 180 without spray head, hose, and holder

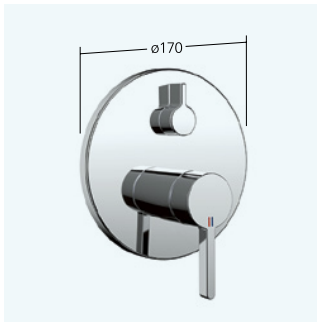
**Shower**

Thermostat style

- EcoProtect - water-saving device
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- SkinProtect - Safety stop prevents scalding
- Turning handle to control flow
- Intrinsicly safe against backflow
- Thermostatic precision control unit
- constant water temperature (even when mains pressure fluctuates)
- fast response
- Wall connections 1/2" x 3/4", without shut-off valve eccentric 10 mm

26.009.130.000

all chrome AD 150 +/- 20 mm without hand shower and hose

**Tub**

Trim kit with function unit

- Outflow top and below
- Turning handle for diverter
- flow rate and temperature continuously variable
- Scope of delivery:
 - Function unit, lever, cap, sleeve, cover plate, diverter
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

20.424.500.000 all chrome

20.424.510.000 all chrome with DIN EN 1717 safety device

**Shower**

Trim kit with function unit

- Outflow top or below
- flow rate and temperature continuously variable
- Scope of delivery:
 - Function unit, lever, cap, sleeve, cover plate
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

21.424.500.000 all chrome

**Tub**

Trim kit with thermostatic function unit

- Outflow top and below
- SkinProtect - Safety stop prevents scalding
- Turning handle to control flow and for diverter
- Intrinsically safe against backflow
- Scope of delivery:
 - Function unit, temperature lever, sleeve, cover plate, holder for escutcheon handle to control flow and for diverter
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

20.004.802.000 all chrome

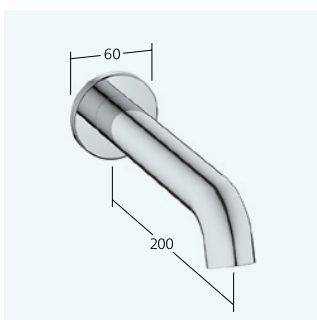
20.004.812.000 all chrome with DIN EN 1717 safety device

**Shower**

Trim kit with thermostatic function unit

- Outflow top or below
- SkinProtect - Safety stop prevents scalding
- Turning handle to control flow
- Intrinsically safe against backflow
- Scope of delivery:
 - Function unit, temperature lever, sleeve, cover plate, holder for escutcheon handle to control flow
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

21.004.802.000 all chrome

**Bathtub spout**

- Fixed spout
- Connecting thread 1/2"

26.008.043.000 all chrome A 200

**Sliding wall bar KWC FIT**

- KWC ball joint bracket, elevation adjustment lockable
- Tube diameter 18 mm

K.26.99.01.000 all chrome L 612

K.26.99.02.000 all chrome L 1100



KWC

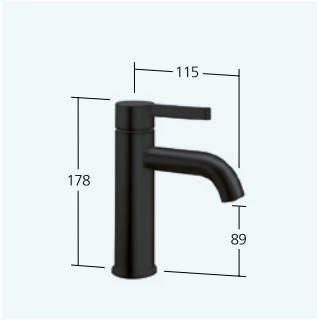




EXTRAVAGANT RESTRAINT: KWC BEVO MATT BLACK

The design: an award-winning homage to the original shape of the faucet, expertly reduced down to the essentials. The color: a strong statement that perfectly complements the simplicity of the faucet. The KWC BEVO matt black: a faucet that fits in with its surroundings with such confidence that it stands out despite its restrained design.





Basin

- Lever mixer
- EcoProtect - water-saving device
- Fixed spout
- flow rate and temperature continuously variable
- temperature limitation

12.421.641.176FL matt black A 115
with Push Open 2 in 1
12.421.051.176FL matt black A 115
without pop-up valve



Basin

- Lever mixer
- EcoProtect - water-saving device
- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- temperature limitation

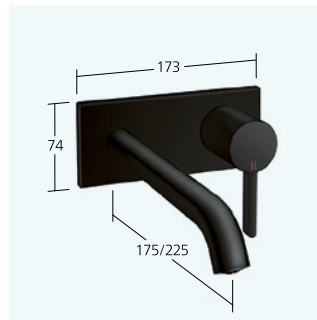
12.421.642.176FL matt black A 140
with Push Open 2 in 1
12.421.052.176FL matt black A 140
without pop-up valve



Basin

- Lever mixer
- For top-mounted basins
- EcoProtect - water-saving device
- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- temperature limitation

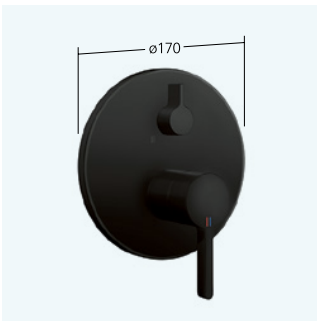
12.421.093.176FL matt black A 195
without pop-up valve



Basin

- Lever mixer
- EcoProtect - water-saving device
- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- To be ordered separately:
 - Unit for concealed installation 1/2"
 - 39.001.401.931

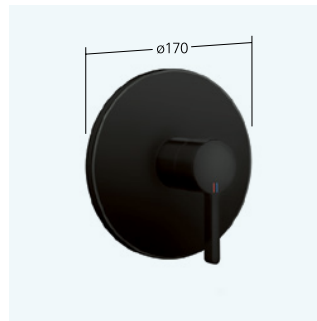
11.422.033.176 matt black A 175
Trim kit
11.422.034.176 matt black A 225
Trim kit



Tub

- Trim kit with function unit
- Outflow top and below
- Turning handle for diverter
- flow rate and temperature continuously variable
- Scope of delivery:
 - Function unit, lever, cap, sleeve, cover plate, diverter
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

20.424.500.176 matt black
Trim kit
20.424.510.176 matt black
Trim kit, with DIN EN 1717 safety device



Shower

- Trim kit with function unit
- Outflow top or below
- flow rate and temperature continuously variable
- Scope of delivery:
 - Function unit, lever, cap, sleeve, cover plate
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

21.424.500.176 matt black
Trim kit

**Tub**

- Trim kit with thermostatic function unit style
- Outflow top and below
 - SkinProtect - Safety stop prevents scalding
 - Turning handle to control flow and for diverter
 - Intrinsicly safe against backflow
 - Scope of delivery:
 - Function unit, temperature lever, sleeve, cover plate, holder for escutcheon handle to control flow and for diverter
 - Fastening of the cover plate without screws
 - To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - ½", without shut-off valve, 39.999.900.931
 - ¾", with shut-off valve, 39.999.930.931
 - ¾" (½"), with shut-off valve, 39.999.910.931

20.004.802.176 matt black

Trim kit

20.004.812.176 matt black

Trim kit, with DIN EN 1717 safety device

**Shower**

- Trim kit with thermostatic function unit style
- Outflow top or below
 - SkinProtect - Safety stop prevents scalding
 - Turning handle to control flow
 - Intrinsicly safe against backflow
 - Scope of delivery:
 - Function unit, temperature lever, sleeve, cover plate, holder for escutcheon handle to control flow
 - Fastening of the cover plate without screws
 - To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - ½", without shut-off valve, 39.999.900.931
 - ¾", with shut-off valve, 39.999.930.931
 - ¾" (½"), with shut-off valve, 39.999.910.931

21.004.802.176 matt black

Trim kit

**Tub**

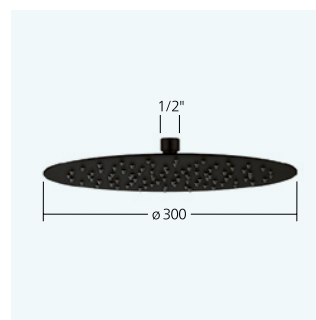
- Lever mixer
- For freestanding tub
 - Integrated check valve in the hose outlet
 - with shower holder
 - Fixed spout
 - flow rate and temperature continuously variable
 - temperature limitation
 - Scope of delivery:
 - Hand shower KWC FIT-X slim 26.000.103.176
 - Shower hose 1500 mm, Z.538.415.176
 - To be ordered separately:
 - Unit for concealed installation 39.000.602.931

20.421.093.176 matt black A 215
with hand shower and hose**KWC pop-up valve Push Open**

- 2 in 1 function
- press to open and close
- can be locked in the open position
- For washstands with or without an overflow

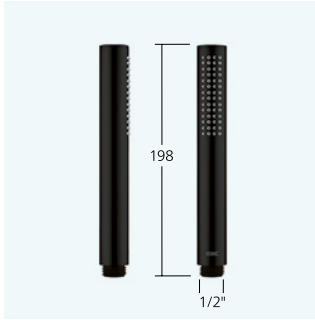
Z.538.321.176 matt black**Shower arm**

- with escutcheon
- suitable for all KWC shower heads (since 2019)
- Connecting thread ½"

26.000.800.176 matt black L 352**Shower head KWC PIATTO-X R**

- Made of stainless steel
- With ball joint
- Cleaning-friendly faceplate
- spajet
- Connecting thread ½"
- To be ordered separately:
 - Bracket

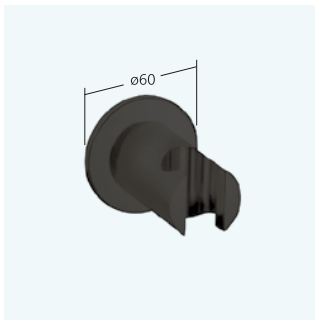
26.000.215.176 matt black Ø 300

**Hand shower KWC FIT-X slim**

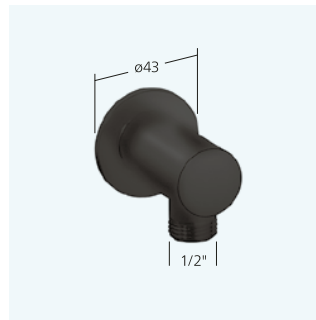
- Made of brass
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Cleaning-friendly faceplate
- fitjet
- Connecting thread 1/2"

26.000.103.176 matt black**Shower hose**

- secure against twisting: rotatable (long) cone
- Made of plastic
- Connecting thread 1/2"

26.001.033.176 matt black**Shower bracket**

- Non-adjustable
- Suitable for:
 - All hand showers

26.000.621.176 matt black**Hose connection**

- Intrinsically safe against backflow
- Connecting thread 1/2"

26.000.610.176 matt black**Sliding wall bar KWC FIT**

- KWC ball joint bracket, elevation adjustment lockable
- Tube diameter 18 mm

K.26.99.02.176 matt black L 1100

FUTURISTIC LIGHTNESS: KWC BEVO BRUSHED STEEL

How can you highlight the minimalistic design and the fine balance between soft contours and straight lines? KWC BEVO brushed steel has the answer: with a finish that adds a touch of weightlessness to the robustness and reliability of the faucet.





Basin

- Lever mixer
- EcoProtect - water-saving device
- Fixed spout
- flow rate and temperature continuously variable
- temperature limitation

12.421.641.177FL brushed steel A 115 with Push Open 2 in 1
12.421.051.177FL brushed steel A 115 without pop-up valve



Basin

- Lever mixer
- EcoProtect - water-saving device
- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- temperature limitation

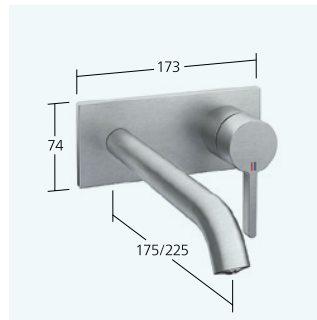
12.421.642.177FL brushed steel A 140 with Push Open 2 in 1
12.421.052.177FL brushed steel A 140 without pop-up valve



Basin

- Lever mixer
- For top-mounted basins
- EcoProtect - water-saving device
- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- temperature limitation

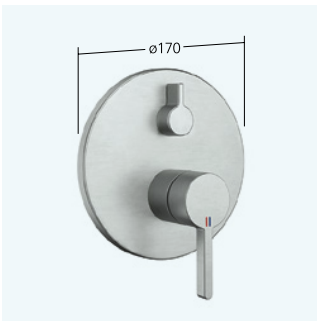
12.421.093.177FL brushed steel A 195 without pop-up valve



Basin

- Lever mixer
- EcoProtect - water-saving device
- Fixed spout
- OptimalSpace - ample space for washing or working
- flow rate and temperature continuously variable
- To be ordered separately:
 - Unit for concealed installation 1/2" 39.001.401.931

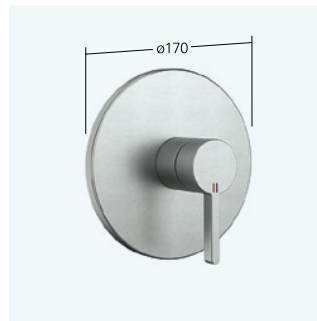
11.422.033.177 brushed steel A 175 Trim kit
11.422.034.177 brushed steel A 225 Trim kit



Tub

- Trim kit with function unit
- Outflow top and below
- Turning handle for diverter
- flow rate and temperature continuously variable
- Scope of delivery:
 - Function unit, lever, cap, sleeve, cover plate, diverter
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

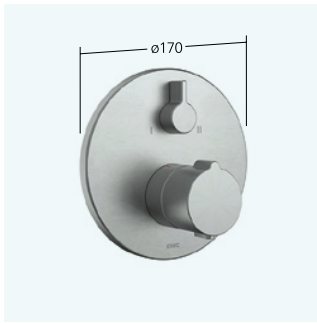
20.424.500.177 brushed steel Trim kit
20.424.510.177 brushed steel Trim kit, with DIN EN 1717 safety device



Shower

- Trim kit with function unit
- Outflow top or below
- flow rate and temperature continuously variable
- Scope of delivery:
 - Function unit, lever, cap, sleeve, cover plate
 - Fastening of the cover plate without screws
- To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - 1/2", without shut-off valve, 39.999.900.931
 - 3/4", with shut-off valve, 39.999.930.931
 - 3/4" (1/2"), with shut-off valve, 39.999.910.931

21.424.500.177 brushed steel Trim kit

**Tub**

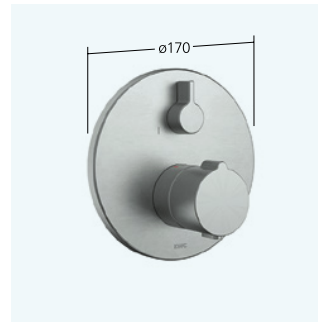
- Trim kit with thermostatic function unit style
- Outflow top and below
 - SkinProtect - Safety stop prevents scalding
 - Turning handle to control flow and for diverter
 - Intrinsicly safe against backflow
 - Scope of delivery:
 - Function unit, temperature lever, sleeve, cover plate, holder for escutcheon handle to control flow and for diverter
 - Fastening of the cover plate without screws
 - To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - ½", without shut-off valve, 39.999.900.931
 - ¾", with shut-off valve, 39.999.930.931
 - ¾" (½"), with shut-off valve, 39.999.910.931

20.004.802.177 brushed steel

Trim kit

20.004.812.177 brushed steel

Trim kit, with DIN EN 1717 safety device

**Shower**

- Trim kit with thermostatic function unit style
- Outflow top or below
 - SkinProtect - Safety stop prevents scalding
 - Turning handle to control flow
 - Intrinsicly safe against backflow
 - Scope of delivery:
 - Function unit, temperature lever, sleeve, cover plate, holder for escutcheon handle to control flow
 - Fastening of the cover plate without screws
 - To be ordered separately:
 - Unit for concealed installation KWC BLUEBOX®
 - ½", without shut-off valve, 39.999.900.931
 - ¾", with shut-off valve, 39.999.930.931
 - ¾" (½"), with shut-off valve, 39.999.910.931

21.004.802.177 brushed steel

Trim kit

**Tub**

- Lever mixer
- For freestanding tub
 - Integrated check valve in the hose outlet
 - with shower holder
 - Fixed spout
 - flow rate and temperature continuously variable
 - temperature limitation
 - Scope of delivery:
 - Hand shower KWC FIT-X slim 26.000.103.176
 - Shower hose 1500 mm, Z.538.415.176
 - To be ordered separately:
 - Unit for concealed installation 39.000.602.931

20.421.093.177 brushed steel A 215

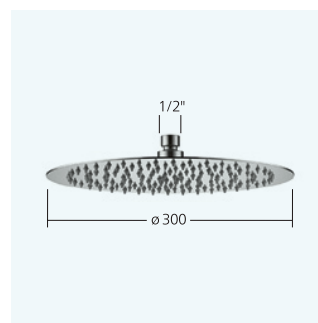
with hand shower and hose

**KWC pop-up valve Push Open**

- 2 in 1 function
- press to open and close
- can be locked in the open position
- For washstands with or without an overflow

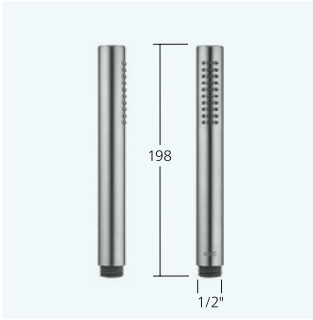
Z.538.321.177 brushed steel**Shower arm**

- with escutcheon
- suitable for all KWC shower heads (since 2019)
- Connecting thread ½"

26.000.800.177 brushed steel L 352**Shower head KWC PIATTO-X R**

- Made of stainless steel
- With ball joint
- Cleaning-friendly faceplate
- spajet
- Connecting thread ½"
- To be ordered separately:
 - Bracket

26.000.215.700 stainless steel Ø 300

**Hand shower KWC FIT-X slim**

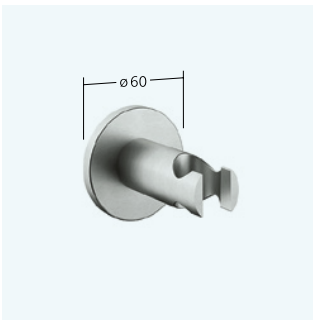
- Made of stainless steel
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Cleaning-friendly faceplate
- fitjet
- Connecting thread 1/2"

26.000.103.700 stainless steel

**Shower hose**

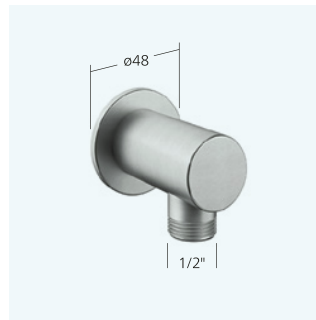
- secure against twisting: rotatable (long) cone
- Made of plastic
- Connecting thread 1/2"

26.001.033.177 brushed steel

**Shower bracket**

- Non-adjustable
- Suitable for:
 - All hand showers

26.000.621.177 brushed steel

**Hose connection**

- Intrinsically safe against backflow
- Connecting thread 1/2"

26.000.610.177 brushed steel

**Sliding wall bar KWC FIT**

- KWC ball joint bracket, elevation adjustment lockable
- Tube diameter 18 mm

K.26.99.02.177 brushed steel L 1100





