


## KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | K.12.JB.52.000B23

Armatura umywalkowa | Armatura samozamykająca

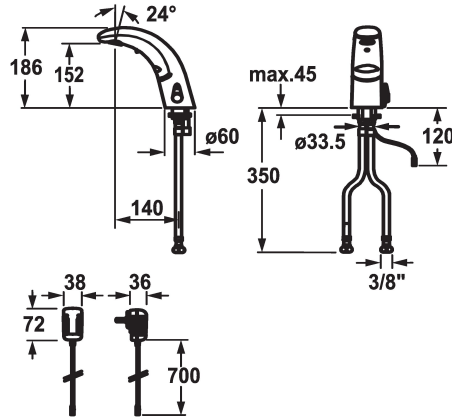

### KWC-No.

#### 119599

chromeline, A 140, flexible connection hoses, without pop-up valve, mains receiver, Basic, with mixing

#### 119601

chromeline, A 140, flexible connection hoses, without pop-up valve, battery, Basic, with mixing

#### \* Automatic controled

- Dual infrared sensor A10

\* With mixing

- temperature limiter adjustable

\* EcoProtect - water-saving device

\* Basic: counter-sunk iqua-click

\* Microprocessor-control

- flow time adjustable (1 second factory setting)

- short time off (cleaning) activatable

- continuous water flow (filling) activatable

- sensor sensitivity adjustable permanent, automatic self-calibration

- 12- or 24-hour-hygiene flushing activatable

#### \* Fixed spout

- Neoperl® Cascade®

\* OptimalSpace - ample space for washing or working

\* Electrovalve

\* Flexible connection hoses 3/8"

\* Fastening by means of stud bolt M8 x 1

\* Mounting hole size ø35 mm

\* Scope of delivery:

- Battery 6 V Lithium 2 CR5

- lifespan at 100 circuits/day: 4 years

3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

### Dane techniczne

A\_Spout\_Spray

5 l/min (3 bar)

ATT-KWC-ABLAUFGARNITUR

ohne\_Ablaufgarnitur

ATT-KWC-EL\_STEUERUNG

berührungslos

Connection

Flexible\_Anschlussschläuche

ATT-KWC-AUSLAUF

fest

ATT-KWC-IQUA\_CLICK

Basic, mit Mischung

ATT-KWC-STROMVERSORGUNG

Batterie

ATT-KWC-FARBCODE

chromeline

Installation\_type

Standmontage

Faucet\_typ

Elektronik

Dimension Height

186

G\_Acoustic group

1

Projection\_A

A140

EnergyLabelCH

A

ATT-KWC-MASS-WASSERAUSTRITT

152

Material

Mosiqdz

