


KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | K.12.JB.52M000B23

Taps | Self closing taps

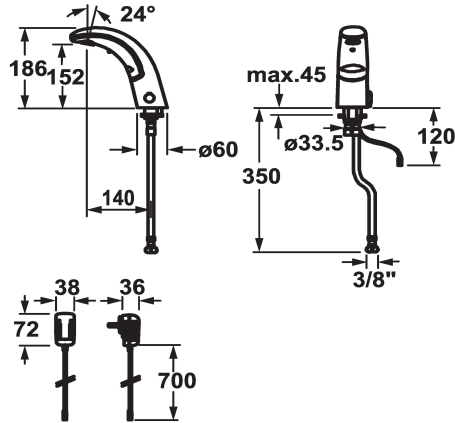

KWC-No.

119602

chromeline, A 140, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing

119603

chromeline, A 140, flexible connection hose, without pop-up valve, battery, Basic, without mixing

* Automatic controled

- Dual infrared sensor A20

* Without mixing

- for cold or mixed water supply

* EcoProtect - water-saving device

* Basic: counter-sunk iqua-click

* Microprocessor-control

- flow time adjustable (1 second factory setting)

- short time off (cleaning) activatable

- continuous water flow (filling) activatable

- sensor sensitivity adjustable permanent, automatic self-calibration

- 12- or 24-hour-hygiene flushing activatable

* Fixed spout

- Neoperl® Cascade®

* OptimalSpace - ample space for washing or working

* Electrovalve

* Flexible connection hose 3/8"

* Fastening by means of stud bolt M8 x 1

* Mounting hole size 635 mm

* Scope of delivery:

- Battery 6 V Lithium 2 CR5

- lifespan at 100 circuits/day; 4 years

3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Technical Data

Flow rate
pop-up assembly
Electronical control
Connection
Spout
IQUA-Click
Power supply
Color code
Installation type
Faucet_typ
Dimension Height
Acoustic group
Projection A
Energy label
Dimension Water outlet
material

5 l/min (3 bar)
without pop-up valve
Automatic, non-contact
Flexible connection hose
fixed
3
battery
chromeline
Pillar installation
Washbasin
186
yes
A 140
A
152
Brass

