


KWC IQUA

Mitigeur automatique, sans contact - Lavabo

Modell-Linie: IQUA | K.12.JB.52M000B23
Robinetteries | Robinets temporisés

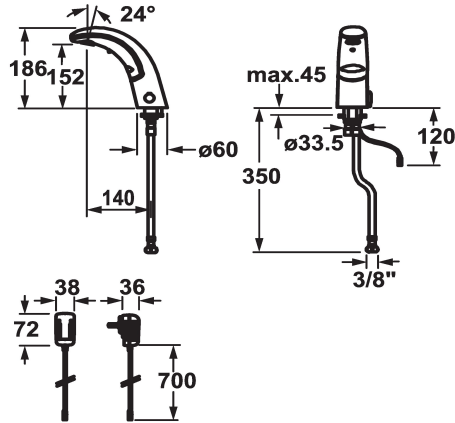

KWC-No.

119602

chromeline, A 140, raccordement flexible, sans vidage, réseau visible, Basic, sans mélangeur

119603

chromeline, A 140, raccordement flexible, sans vidage, pile, Basic, sans mélangeur

- * Automatic controled
- Dual infrared sensor A20
- * Without mixing
- for cold or mixed water supply
- * EcoProtect - water-saving device
- * Basic: counter-sunk iqua-click
- * Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration
- 12- or 24-hour-hygiene flushing activatable

- * Fixed spout
- Neoperl® Cascade®
- * OptimalSpace - ample space for washing or working
- * Electrovalve
- * Flexible connection hose 3/8"
- * Fastening by means of stud bolt M8 x 1
- * Mounting hole size ø35 mm
- * Scope of delivery:
- Battery 6 V Lithium 2 CR5
- lifespan at 100 circuits/day: 4 years
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Données techniques

Débit
vidage
Contrôle électronique
Raccord
goulot
IQUA-Click
Alimentation électrique
Code couleur
Type d'installation
Type de robinet
Dimension de la hauteur
Groupe de bruit pour la robinetterie
Projection A
Label énergétique
Dimension de la sortie d'eau
Matière

5 l/min (3 bar)
sans vidage
sans contact
Raccordement flexible
Fixe
3
pile
chromeline
montage vertical
06
186
yes
A140
A
152
Laiton

