


## KWC IQUA

Mitigeur automatique, sans contact - Lavabo

Modell-Linie: IQUA | K.12.JB.52M000B23  
Robinetteries | Robinets temporisés

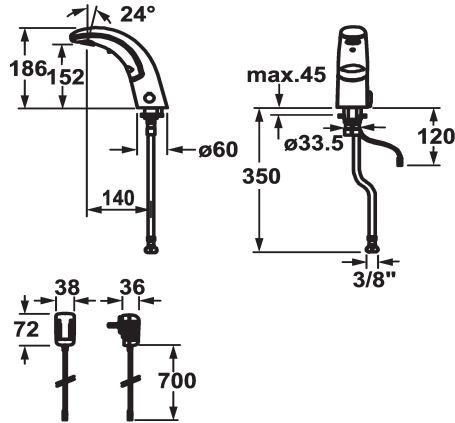

### KWC-No.

#### 119602

chromeline, A 140, raccordement flexible, sans vidage, réseau visible, Basic, sans mélangeur

#### 119603

chromeline, A 140, raccordement flexible, sans vidage, pile, Basic, sans mélangeur

- \* Automatic controled
- Dual infrared sensor A20
- \* Without mixing
- for cold or mixed water supply
- \* EcoProtect - water-saving device
- \* Basic: counter-sunk iqua-click
- \* Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration
- 12- or 24-hour-hygiene flushing activatable

- \* Fixed spout
- Neoperl® Cascade®
- \* OptimalSpace - ample space for washing or working
- \* Electrovalve
- \* Flexible connection hose 3/8"
- \* Fastening by means of stud bolt M8 x 1
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
- Battery 6 V Lithium 2 CR5
- lifespan at 100 circuits/day: 4 years
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

### Données techniques

Débit
vidage
Contrôle électronique
Raccord
goulot
IQUA-Click
Alimentation électrique
Code couleur
Type d'installation
Type de robinet
Dimension de la hauteur
Groupe de bruit pour la robinetterie
Projection A
Label énergétique
Dimension de la sortie d'eau
Matière

5 l/min (3 bar)
sans vidage
sans contact
Raccordement flexible
Fixe
3
pile
chromeline
montage vertical
06
186
yes
A140
A
152
Laiton

