


KWC ZOE Lever mixer - Kitchen

Modell-Linie: ZOE | 10.201.102.127FL
Umyvadlové armatury | Hydraulické armatury

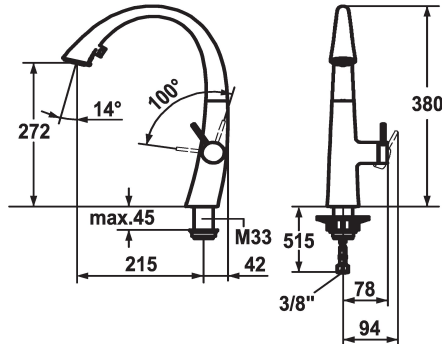

KWC-No.

122926
chromeline, A 215, flexible connection hoses

122931
decor steel, A 215, flexible connection hoses

123312
glacier white, A 215, flexible connection hoses

124349
matt black, A 215, flexible connection hoses

ATT-KWC-FARBCODE

chromeline

decor steel

glacier white

matt black

- * Lever mixer
- * Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- * gap between wall and centre of mounting hole min. 42 mm
- * TouchProtect - anti-scald protection thanks to the "double skin" principle
- * Covered pull-out spray
- ergonomic spout alignment, shape and handling
- SprayClean - easy to clean and actively prevents limescale buildup
- Neoperl® Cascade®
- PowerClean - needle spray mode, with automatic diverter reset

- up to 500 mm pull-out length
- hose surface to fit faucet surface
- * SwivelStop - hose guide, swivelling 270°, limitable to 120°
- * EasyLock - a pull-out spray that easily slides back into place
- * OptimalSpace - ample space for washing or working
- * KWC cartridge S 25
- with ceramic discs
- flow rate and temperature continuously variable
- * Flexible connection hoses 3/8"
- * Fastening by means of threaded sleeve M33 x 1.5
- * Mounting hole size ø35 mm

Technické údaje

ATT-KWC-A_AUSZUGBRAUSE_SIEB

ATT-KWC-A_AUSZUGBRAUSE_NORMAL

Connection

ATT-KWC-AUSLAUF

Handling

Kitchen_spray

ATT-KWC-FARBCODE

Installation_type

Faucet_typ

ATT-KWC-BAUFORM

Measure_Height

G_Acoustic group

Projection_A

EnergyLabelCH

ATT-KWC-MASS-WASSERAUSTRITT

Material

9 l/min (3 bar)

8 l/min (3 bar)

flexible_Anschlusschläuche

schwenkbar

seitenbedient

Umstellbrause

decor steel

Standmontage

01

J-Auslauf

380

2

A215

A

272

mosaz

