


KWC KIO  
Kitchen - with LED-technology

Modell-Linie: KIO | 10.481.232.176FL  
Taps | Electronic taps

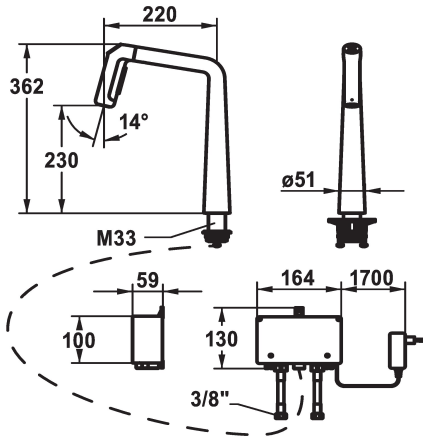

KWC-No.

- 125193**  
chromeline, A 220, flexible connection hoses, mains receiver
- 125194**  
matt black, A 220, flexible connection hoses, mains receiver
- 125195**  
decor steel, A 220, flexible connection hoses, mains receiver

Color code

- chromeline
- matt black
- decor steel


- \* IntelligentControl - electronic control
- \* gap between wall and centre of mounting hole min. 26 mm
- \* TouchProtect - anti-scald protection thanks to the "double skin" principle
- \* Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
- \* Pull-out spray ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Perlator® laminar
  - PowerClean - needle spray mode, with automatic diverter reset
- Integrated control unit

- up to 500 mm pull-out length
- \* Hose guide, swivelling 150°, can be extended to 360°
- \* EasyLock - a pull-out spray that easily slides back into place
- \* OptimalSpace - ample space for washing or working
- \* KWC control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - with-out installation materials
  - designed for wired connection to 1 operating unit (standard)
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection with locking screws
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 12 V / cable length 2000 mm
- \* To be ordered separately (optional or if necessary):
  - Swivel range limited to 120° Z.538.320

Technical Data

Flow rate
Electronical control
Light
Connection
Spout
Power supply
Handling
Kitchenspray
Color code
Installation type
Faucet_typ
Design
Measure Height
Acoustic group

10 l/min (3 bar)
Automatic, low-contact
with LED-Technologie
Flexible connection hoses
swivel
mains receiver
front lever
Pull-out spray
matt black
Pillar installation
Lever mixer
L-Spout
362
I





**KWC** KIO  
Kitchen - with LED-technology

**Modell-Linie: KIO | 10.481.232.176FL**  
Taps | Electronic taps

Projection A	A 220
Energy label	B
Dimension Water outlet	230
material	Brass

**Spare Parts**



**Wrench to KIO pull-out spray**  
**538810**  
Z.538.810