


## KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.171.000

Armatura umywalkowa | Armatura samozamykająca

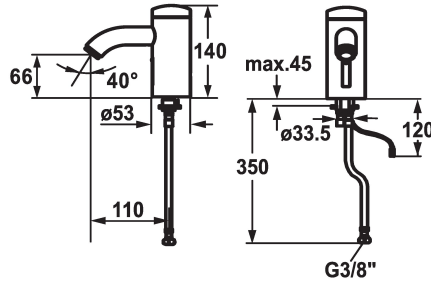

### KWC-No.

#### 125277

chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing

#### 125278

chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing

- \* Automatic controled style
- \* Infrared sensor L20
- \* Without mixing
- for cold or mixed water supply
- \* EcoProtect - water-saving device
- \* Basic: counter-sunk iqua-click
- \* Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration
- 12- or 24-hour-hygiene flushing activatable

### Dane techniczne

A\_Spout\_Spray

ATT-KWC-ABLAUFGARNITUR

ATT-KWC-EL\_STEUERUNG

Connection

ATT-KWC-AUSLAUF

ATT-KWC-IQUA\_CLICK

ATT-KWC-STROMVERSORGUNG

ATT-KWC-FARBCODE

Installation\_type

Faucet\_typ

Dimension Height

G\_Acoustic\_group

Projection\_A

EnergyLabelCH

ATT-KWC-MASS-WASSERAUSTRITT

Material

### ATT-KWC-STROMVERSORGUNG

Batterie

Netz AP

- \* Fixed spout
- Neoperl® Cascade®
- \* Electrovalve
- \* Flexible connection hose 3/8"
- \* Fastening by means of stud bolt M8 x 1
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
- Battery 6 V Lithium CRP2
- lifespan at 100 circuits/day; 4 years
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

6 l/min (3 bar)

ohne\_Ablaufgarnitur

berührungslos

Flexibler\_Anschluss Schlauch

fest

3

Batterie

chromeline

Standmontage

06

140

1

A110

A

66

Mosiqdz

