


## KWC AVA 2.0 Lever mixer

Modell-Linie: AVA 2.0 | 10.461.002.176FL  
Taps | Manual taps

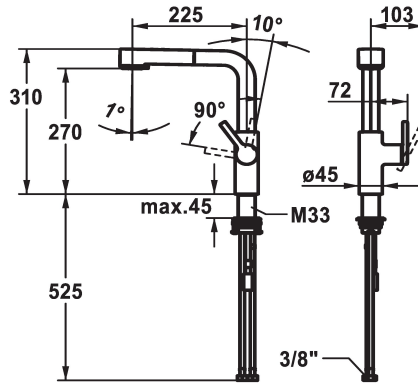

### KWC-No.

**125373**  
chromeline, A 225, flexible connection hoses

**125374**  
matt black, A 225, flexible connection hoses

**125375**  
brushed steel, A 225, flexible connection hoses

### Color code

chrome

matt black

brushed steel

- \* Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- \* gap between wall and centre of mounting hole min. 20 mm
- \* TouchProtect - anti-scald protection thanks to the "double skin" principle
- \* Intrinsicly safe against backflow
- \* Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system

- \* Hose guide, swivelling 150°
- \* EasyLock - a pull-out spray that easily slides back into place
- \* OptimalSpace - ample space for washing or working
- \* KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection with locking screws
- \* Mounting hole size ø35 mm
- \* To be ordered separately (optional or if necessary):
  - Swivel range limited to 120° Z.538.320

### Technical Data

Flow rate needle spray

9 l/min (3 bar)

Flow rate normal spray

8 l/min (3 bar)

Connection

Flexible connection hoses

Spout

swivel

Handling

side lever

Kitchen\_spray

Pull-out spray

Color code

matt black

Installation\_type

Pillar installation

Faucet\_typ

Lever mixer

Design

L-Spout

Dimension Height

310

G\_Acoustic group

I

Projection\_A

A 225

Energy Label

A

Dimension Water outlet

270

material

Brass

