


## KWC AVA 2.0

Lever mixer

Modell-Linie: AVA 2.0 | 10.461.002.177FL

Taps | Manual taps

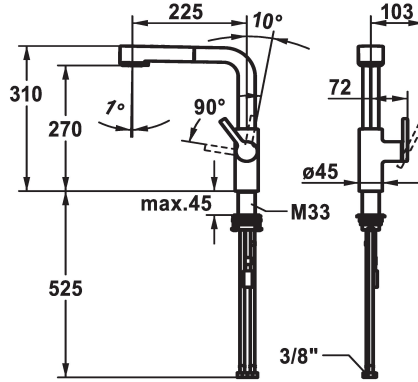

### KWC-No.

#### 125373

chromeline, A 225, flexible connection hoses

#### 125374

matt black, A 225, flexible connection hoses

#### 125375

brushed steel, A 225, flexible connection hoses

### Color code

chrome

matt black

brushed steel

**NEW**

- \* Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- \* gap between wall and centre of mounting hole min. 20 mm
- \* TouchProtect - anti-scald protection thanks to the "double skin" principle
- \* Intrinsicly safe against backflow
- \* Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system

- \* Hose guide, swivelling 150°
- \* EasyLock - a pull-out spray that easily slides back into place
- \* OptimalSpace - ample space for washing or working
- \* KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection with locking screws
- \* Mounting hole size  $\varnothing 35$  mm
- \* To be ordered separately (optional or if necessary):
  - Swivel range limited to 120° Z.538.320

### Technical Data

Flow rate needle spray
Flow rate normal spray
Connection
Spout
Handling
Kitchen_spray
Color code
Installation_type
Faucet_typ
Design
Dimension Height
G_Acoustic group
Projection_A
Energy Label
Dimension Water outlet
material

9 l/min (3 bar)
8 l/min (3 bar)
Flexible connection hoses
swivel
side lever
Pull-out spray
brushed steel
Pillar installation
Lever mixer
L-Spout
310
I
A 225
A
270
Brass

