


## KWC BISTRO E Lever mixer – Kitchen

Modell-Linie: BISTRO E | 10.581.433.700FL  
Taps | Manual taps

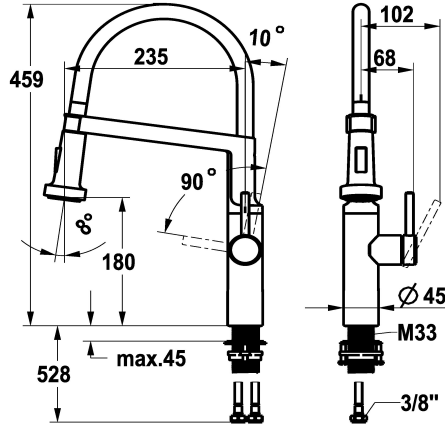

### KWC-No.

**125694**  
stainless steel, A 235, flexible connection hoses

- \* Lever mixer
- \* HighFlex patented spring hose technology
- \* Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- \* TouchProtect - anti-scald protection thanks to the "double skin" principle
- \* Spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Caché® SSR, swivelling jet regulator
  - PowerClean - needle spray mode, with automatic diverter reset

- \* EasyLock - a pull-out spray that easily slides back into place
- \* Swivel spout 360°
- \* OptimalSpace - ample space for washing or working
- \* KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection with locking screws
- \* Mounting hole size ø35 mm

NEW

### Technical Data

|                        |                           |
|------------------------|---------------------------|
| Flow rate              | 8 l/min (3 bar)           |
| Spray: Flow rate       | 6.4 l/min (3 bar)         |
| Connection             | Flexible connection hoses |
| Spout                  | swivel                    |
| Handling               | side lever                |
| Kitchen_spray          | Diverter spray            |
| Color code             | stainless steel           |
| Installation_type      | Pillar installation       |
| Faucet_typ             | Lever mixer               |
| Design                 | J-Spout                   |
| Dimension Height       | 459                       |
| G_Acoustic group       | I                         |
| Projection_A           | A 235                     |
| Energy Label           | A                         |
| Dimension Water outlet | 180                       |
| material               | stainless steel           |

|                           |
|---------------------------|
| 8 l/min (3 bar)           |
| 6.4 l/min (3 bar)         |
| Flexible connection hoses |
| swivel                    |
| side lever                |
| Diverter spray            |
| stainless steel           |
| Pillar installation       |
| Lever mixer               |
| J-Spout                   |
| 459                       |
| I                         |
| A 235                     |
| A                         |
| 180                       |
| stainless steel           |

