


## KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | K.12.JB.52.000N23

Taps | Self closing taps

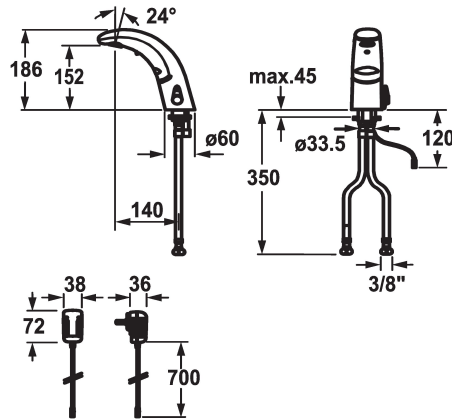

### KWC-No.

#### 119599

chromeline, A 140, flexible connection hoses, without pop-up valve, mains receiver, Basic, with mixing

#### 119601

chromeline, A 140, flexible connection hoses, without pop-up valve, battery, Basic, with mixing

- \* Automatic controlled
  - Dual infrared sensor A10
- \* With mixing
  - temperature limiter adjustable
- \* EcoProtect - water-saving device
- \* Basic: counter-sunk iqua-click
- \* Microprocessor-control
  - flow time adjustable (1 second factory setting)
  - short time off (cleaning) activatable
  - continuous water flow (filling) activatable
  - sensor sensitivity adjustable permanent, automatic self-calibration
  - 12- or 24-hour-hygiene flushing activatable

- \* Fixed spout
    - Neoperl® Cascade®
  - \* OptimalSpace - ample space for washing or working
  - \* Electrovalve
  - \* Flexible connection hoses 3/8"
  - \* Fastening by means of stud bolt M8 x 1
  - \* Mounting hole size 60 mm
  - \* Scope of delivery:
    - Mains receiver 100-240 V / operating voltage 6 V
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

### Technical Data

Flow rate
pop-up valve
Electronical control
Connection
Spout
IQUA-Click
Power supply
Color code
Installation type
Faucet_typ
Measure Height
Acoustic group
Projection A
Energy label
Dimension Water outlet
material

5 l/min (3 bar)
without pop-up valve
Automatic, non-contact
Flexible connection hoses
fixed
yes
mains receiver
chromeline
Pillar installation
Washbasin
186
yes
A 140
A
152
Brass

