


KWC AVA 2.0 Lever mixer - Basin - CoolFix

Modell-Linie: AVA 2.0 | 12.468.031.000FL
Taps | Manual taps

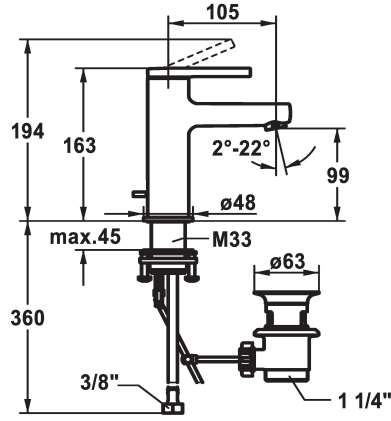

KWC-No.

125075
chromeline, A 105, flexible connection hoses, with pop-up valve

125076
chromeline, A 105, flexible connection hoses, without pop-up valve

125077
chromeline, A 105, flexible connection hoses, with Push Open

- * CoolFix - Cold water flow with a centered lever
- * EcoProtect - water-saving device
- * Fixed spout
- Neoperl® Perlator® SSR, swivelling jet regulator
- * KWC cartridge S 25
- with ceramic discs
- flow rate and temperature continuously variable

pop-up assembly

with pop-up valve

without pop-up valve

with Push open

- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size ø35 mm
- * Scope of delivery:
- KWC pop-up valve Z.538.581.000

Technical Data

Flow rate	5 l/min (3 bar)
pop-up assembly	with pop-up valve
Connection	Flexible connection hoses
Spout	fixed
Handling	top lever
Color code	chromeline
Installation type	Pillar installation
Faucet_typ	Faucet
Dimension Height	163
Energysaving	Coolfix
Acoustic group	yes
Projection A	A 105
Energy label	A
Dimension Water outlet	99
material	MESSING

Flow rate	5 l/min (3 bar)
pop-up assembly	with pop-up valve
Connection	Flexible connection hoses
Spout	fixed
Handling	top lever
Color code	chromeline
Installation type	Pillar installation
Faucet_typ	Faucet
Dimension Height	163
Energysaving	Coolfix
Acoustic group	yes
Projection A	A 105
Energy label	A
Dimension Water outlet	99
material	MESSING

