


KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.151.000

Hanot | Itsulkeutuvat hanat

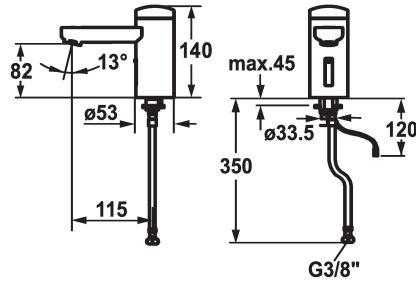

KWC-No.

125257

chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing

125258

chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing

* Automatic controled design

* Infrared sensor L20

* Without mixing

- for cold or mixed water supply

* EcoProtect - water-saving device

* Basic: counter-sunk iqua-click

* Microprocessor-control

- flow time adjustable (1 second factory setting)

- short time off (cleaning) activatable

- continuous water flow (filling) activatable

- sensor sensitivity adjustable permanent, automatic self-calibration

- 12- or 24-hour-hygiene flushing activatable

ATT-KWC-STROMVERSORGUNG

Batterie

Netz AP

* Fixed spout

- Neoperl® Cascade®

* Electrovalve

* Flexible connection hose 3/8"

* Fastening by means of stud bolt M8 x 1

* Mounting hole size ø35 mm

* Scope of delivery:

- Battery 6 V Lithium CRP2

- lifespan at 100 circuits/day; 4 years

3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Tekniset tiedot

A_Spout_Spray

ATT-KWC-ABLAUFGARNITUR

ATT-KWC-EL-STEUERUNG

Connection

Spout

ATT-KWC-IQUA_CLICK

ATT-KWC-STROMVERSORGUNG

ATT-KWC-FARBCODE

Installation_type

Faucet_typ

Measure_Height

G_Acoustic_group

Projection_A

EnergyLabelCH

ATT-KWC-MASS-WASSERAUSTRITT

Materiali

lviCode

6 l/min (3 bar)

ohne_Ablaufgarnitur

berührungslos

Flexibler_Anschluss Schlauch

Kiinnitety

3

Batterie

chromeline

Standmontage

06

140

yes

A115

A

82

Messinki

0

