


## KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.061.000

Taps | Self closing taps

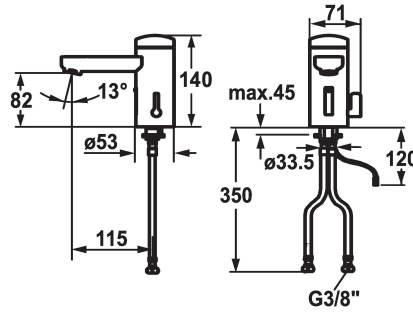

### KWC-No.

#### 125259

chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, with mixing

#### 125260

chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, with mixing

\* Automatic controled design

\* Infrared sensor L10

\* With mixing

- temperature limiter adjustable

\* EcoProtect - water-saving device

\* Basic: counter-sunk iqua-click

\* Microprocessor-control

- flow time adjustable (1 second factory setting)

- short time off (cleaning) activatable

- continuous water flow (filling) activatable

- sensor sensitivity adjustable permanent, automatic self-

calibration

- 12- or 24-hour-hygiene flushing activatable

### Power\_supply

battery

mains receiver

\* Fixed spout

- Neoperl® Cascade®

\* Electrovalve

\* Flexible connection hoses 3/8"

\* Fastening by means of stud bolt M8 x 1

\* Mounting hole size 35 mm

\* Scope of delivery:

- Battery 6 V Lithium CRP2

- lifespan at 100 circuits/day: 4 years

3 Avoid using infrared controls near highly reflective surfaces (e.g.

mirrors, polished stainless steel basins) as this could cause them to

activate accidentally or malfunction.

### Technical Data

Flow rate
Pop-up_valve
Electronical_control
Connection
Spout
IQUA-Click
Power_supply
Color code
Installation_type
Faucet_typ
Dimension Height
Acoustic group
Projection_A
Energy Label
Dimension Water outlet
material

6 l/min (3 bar)
without pop-up valve
Automatic, non-contact
Flexible connection hose
fixed
Battery1
battery
chrome
Pillar installation
Washbasin
140
Battery1
A 115
A
82
Brass

