


KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.181.000
Kranar | Samouzavírací armatury

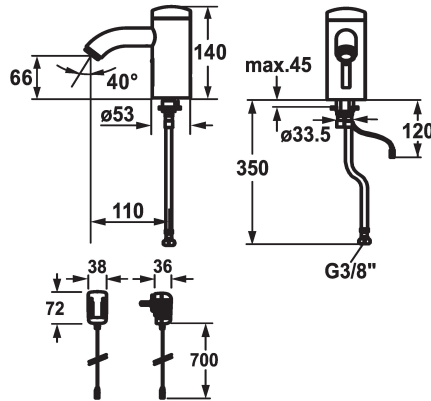

KWC-No.

125277

chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing

125278

chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing

- * Automatic controlled style
- * Infrared sensor L20
- * Without mixing
- for cold or mixed water supply
- * EcoProtect - water-saving device
- * Basic: counter-sunk iqua-click
- * Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration

- 12- or 24-hour-hygiene flushing activatable
- * Fixed spout
- Neoperl® Cascade®
- * Electrovalve
- * Flexible connection hose 3/8"
- * Fastening by means of stud bolt M8 x 1
- * Mounting hole size 35 mm
- * Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6 V
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Technical Data

A_Spout_Spray
ATT-KWC-ABLAUFGARNITUR
ATT-KWC-EL_STEUERUNG
Connection
ATT-KWC-AUSLAUF
ATT-KWC-IQUA_CLICK
ATT-KWC-STROMVERSORGUNG
ATT-KWC-FARBCODE
Installation_type
Faucet_typ
Measure_Height
G_Acoustic group
Projection_A
EnergyLabelCH
ATT-KWC-MASS-WASSERAUSTRITT
Material

6 l/min (3 bar)
ohne_Ablaufgarnitur
berührungslos
Flexibler_Anschlusschlauch
fest
3
Netz AP
chromeline
Standmontage
06
140
1
A110
A
66
MESSING

