


KWC HEAVY-DUTY
WC washbasin combination

Modell-Linie: HEAVYDUTY | HDTX805M
Heavy Duty | Prison units

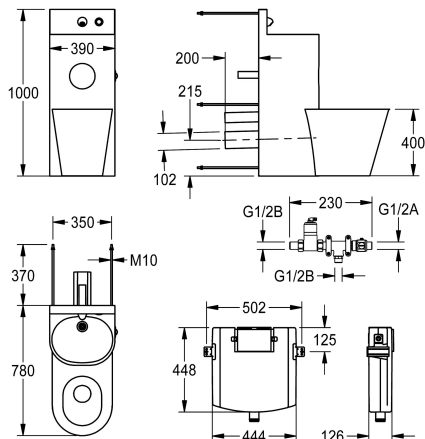

KW C-No.

2000100953

Version with WC pan angled 45° to the left

2000100954

Version with centrally arranged WC pan Dimensions 390 x 1000 x 780 mm (W x H x D)

2000100955

Version with WC pan angled 45° to the right Dimensions 700 x 1000 x 670 mm (W x H x D)

WC position

left

middle

right

Chromium nickelsteel WC wash basin combination, satin finish surface for installing outside a utility room accessible from the back with remotely controlled tap components for fitting in the utility room, fixing from the back with threaded pins. Mounting stand, material thickness 2 mm with elevated rear wall including wall outlet and press button operation, seamless welded WC paper compartment and seamless moulded wash basin with trap, outlet DN 40. WC pan, material thickness 1.6 mm with full-length skirting, arranged in the middle 90 degrees, bowl rim where nothing can hide, flushing

certified pursuant to EN 997, horizontal outlet at the back DN 100. Self-closing gate valve with remote control to connect to premixed hot water or cold water, closing automatically with no blow back. Condensation water-proof concealed cistern with single flush technology (9 or 6 litres) including fixing material.

Overall dimensions 390 x 1000 x 780 mm (W x H x D)
WC position in the middle

Technical Data

body width
front access panel
floor fixing joggle plate
inlet size
material
material code
material thickness body
material thickness WC
outlet size
overall depth
overall height
overall width
overflow
pipework material
self closing push buttons
toilet roll holder diameter
shroud design
soap dish
spout length

390 mm
yes
no
DN 15
stainless steel
1.4301 Chrome Nickel steel V2A
2 mm
1.5 mm
DN 50 / DN 100
775 mm
1,000 mm
390 mm
no
stainless steel
mechanical
153 mm
round shape
no
83 mm





KWC HEAVY-DUTY
WC washbasin combination

Modell-Linie: HEAVYDUTY | HDTX805M
Heavy Duty | Prison units

surface finish	satin finished
tap with integrated bubbler	no
type of flushing fitting	WC cistern
type of mounting	bolt mounting
type of toilet seat	no seat
type of WC	floor standing
upper edge of basin height	850 mm
upstand depth	20 mm
upstand height	150 mm
WC height	400 mm
WC position	middle

Spare Parts



Remote operation valve

2000104780
EFLSY0027




Wall outlet, DN 15

2000107291
ZTAPS0004



Functional element

2000105612
EFLSY0036

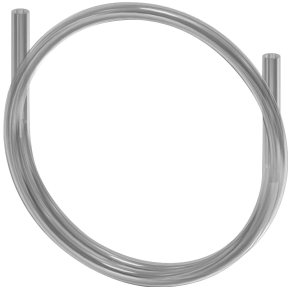

Remote operation hose

2000104803
EAQLN0019