


## KWC

### F5S-Mix self-closing in-wall mixer

Modell-Linie: **F5S** | **F5SM2004**  
Showers | Self closing showers

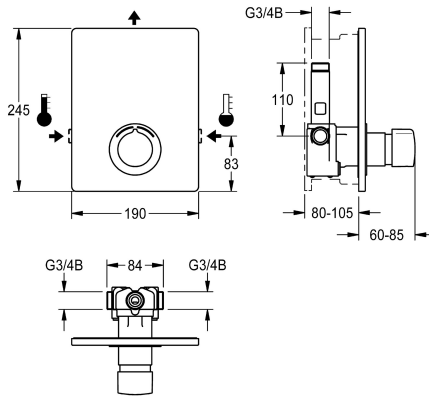

#### KWC-No.

**2030029012**

**2030036693**

with automatic shower pipe draining

#### shower pipe draining

no

yes

F5S-Mix self-closing single-mixer DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With adjustable, turn-

proof temperature stop. Connects to hot and cold water. All-metal construction, visible parts high-polished, chromium-plated. Holding frame including profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing, chromium-plated plastic rosettes, backflow preventer and strainers. Depth adjustability 25 mm.

#### Technical Data

additional connections

no

with backflow preventer

yes

Built-in fitting model

Finishing section

calculation flow rate cold wat

0.15 l/s

calculation flow rate hot water

0.15 l/s

circulation

no

compatible A3000 open

no

connection with pay water disp

not possible

Cover plate height

245 mm

Cover plate width

190 mm

with filter

yes

adjustable flow time

yes

functional principle

hydraulic self-closing

for hand shower

no

hygiene flushing

no

diameter nominal

DN 15

inlet size

G 3/4 B

Locking mechanism

Top section, ceramic

material casing

stainless steel

material fitting

brass

maximum flow time

35 Seconds

minimum flow pressure

0.5 bar

minimum flow time

5 Seconds



## KWC


### F5S-Mix self-closing in-wall mixer

Modell-Linie: F5S | F5SM2004

Showers | Self closing showers

type of mixing	yes
with rosettes/cover plate	yes
protective shutdown	no
shower pipe draining	no
sound insulation	no
surface finish casing	satin finished
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
with transformer/power supply	no
type of mounting	in-wall installation with box
type of operation	manual operation
type of shower	in-wall fitting
volume flow rate at 3 bar	0.2 l/s
water connection	threaded connection (external)
position of water connection	from side
Accent colour	chrome-look (glossy)
Basic colour	stainless steel

#### Mandatory Accessories




#### R5 System box for in-wall mixer

**2030028990**

F5BX2001

#### Optional Accessories

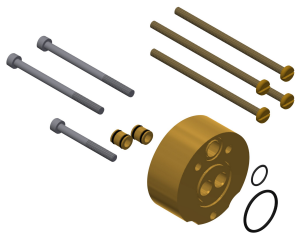

## KWC

### F5S-Mix self-closing in-wall mixer

Modell-Linie: F5S | F5SM2004  
Showers | Self closing showers

#### Extension set for F5S

**2030044781**  
ACSM2001

#### Spare Parts



Plug chromed

**2030053006**  
ASSX9004




Handle push cap

**2030050753**  
ASSM9004



Safety ring

**2030048357**  
ASSX9003



Rosette

**2030045510**  
ASXM2003



FRAMIC self-closing mixing cartridge

**2030046185**  
ASSM9001



Stainless steel care set

**2000109019**  
ZWSPL0024



Cleaning product CHROMOL

**2000105091**  
ZWSPL0023