


KWC F5E

Electronic pillar tap with plug-in power supply unit

Modell-Linie: F5E | F5EV1002
Taps | Electronic taps

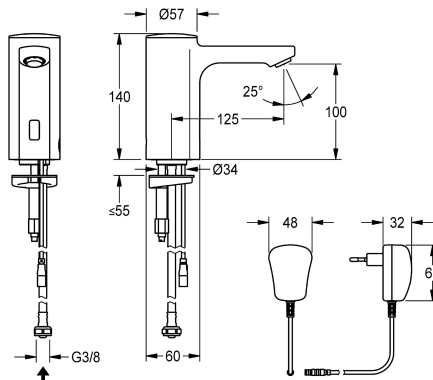

KWC-No.

2030035330

2030039436

with flow regulator 3.0 l/min

volume flow rate at 3 bar

0.08 l/s

0.05 l/s

F5E pillar tap DN 15 for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Anti-theft aerator, design SLIM, with integrated flow regulator 5.0 l/min.

Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. With 100 - 240 V AC plug-in power supply unit.

Technical Data

with backflow preventer

calculation flow rate cold wat

compatible A3000 open

default automatic hygiene flus

depressurised

with filter

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material fitting

minimum flow pressure

type of mixing

Parameterization

Pop-up waste set

power supply connection

position of power connection

power consumption

Type of power supply

protective system IP

with rosettes/cover plate

protective shutdown

sound insulation

No

0.1 l/s

No

24h after the last activity

No

Yes

electronic self-closing

Yes

DN 15

G 3/8

Top section, non-ceramic

brass-look

1 bar

No

remote control

No

100 - 240 V AC

from bottom

1.5 Voltampere

Transformer

IP59K

No

Yes

No



KWC F5E

Electronic pillar tap with plug-in power supply unit

Modell-Linie: F5E | F5EV1002

Taps | Electronic taps

Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	No
thermal disinfection	No
with transformer/power supply	Yes
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.08 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Bidirectional remote control for electronic fittings F3 and F5

2030036654
ACEX9005




2-button remote control for fittings F3 and F5

2030036849
ACEX9004




Socket

2030040334
ACEX1001

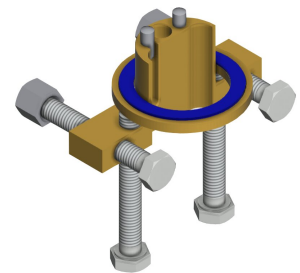

Anti-twist protection for F5S

2030035383
ACXX1001



Extension cable 5 m

2030043814
ACEX9010



PURETHERM under-table thermostat

2030012758
PURE0031



5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002



3.0 l/min. aerator

2030041424
ASXX1008

KWC F5E

Electronic pillar tap with plug-in power supply unit

Modell-Linie: F5E | F5EV1002


Taps | Electronic taps



Aerator 1.8 l/min

2030041442
ACXX1005

Spare Parts




Aerator 5.0 l/min

2030041011
ASXX1004




Cap

2030041558
ASEX1007




Plug red

2030041951
ASEX1009



Plug blue

2030041952
ASEX1010



Solenoid valve cartridge

2030045522
ACXX9002



Hose

2030041311
ASXX1005



Quick-action fastener

2030043596
ASEX1013




Water way

2030041949
ASEX1008

KWC F5E

Electronic pillar tap with plug-in power supply unit

Modell-Linie: F5E | F5EV1002
Taps | Electronic taps



Sensor, ID 01/00004

2030041458
ASEX1005

Plug-in power supply unit

2030039823
ACEX9002

Mounting key

2030041329
ACXX1003