


KWC F5E-Therm
Electronic thermostatic wall-mounted mixer for separate power supply

Modell-Linie: F5E | F5ET1005
Taps | Electronic taps

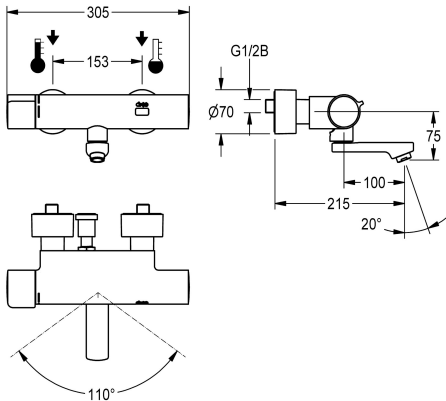


KWC-No.	spout projection	thermal disinfection
2030036211	215 mm	yes
2030036210 Projection 155 mm	155 mm	yes
2030036212 Projection 275 mm	275 mm	yes
2030039530 with projection 155 mm and pre-installed disinfection unit	155 mm	automatic thermal disinfection
2030039538 with projection 215 mm and pre-installed disinfection unit	215 mm	automatic thermal disinfection
2030039539 with projection 275 mm and pre-installed disinfection unit	275 mm	automatic thermal disinfection

F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling spout, for sanitary facilities. Opto-electronically controlled, triggered via hand movement. Thermostat with metal handle with adjustable and turn-proof temperature stop. With option for thermal disinfection, manually or automatically via optional disinfection unit. For connection to hot and cold water. Control electronics, solenoid valve cartridge and sensor in scald-protected safe-touch housing, high-polished chromium-plated brass. Laminar jet controller with integrated flow regulator 6.0 l/min.

With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 215 mm. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. Separate power supply via power supply unit 6.75 V / 12 V DC or AQUA 3000 open system accessories.

Technical Data	
with backflow preventer	yes
calculation flow rate cold wat	0.07 l/s
calculation flow rate hot wate	0.07 l/s
compatible A3000 open	yes
default automatic hygiene flus	24h after the last activity
default flow time	10 Seconds
depressurised	no
with filter	yes
adjustable flow time	yes
functional principle	electronic self-closing
hygiene flushing	yes
diameter nominal	DN 15
inlet size	G 1/2 B
Locking mechanism	Top section, non-ceramic
material fitting	brass






KWC F5E-Therm
Electronic thermostatic wall-mounted mixer for separate power supply

Modell-Linie: F5E | F5ET1005
Taps | Electronic taps


maximum flow time	255 Seconds
minimum flow pressure	1 bar
minimum flow time	1 Seconds
type of mixing	with thermostat
Parameterization	remote control
Pop-up waste set	no
power supply connection	6,75 / 12 VDC / A3000 open
position of power connection	from backside
power consumption	1.5 Voltampere
Type of power supply	Transformer
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	yes
sound insulation	no
Spout	rotating, bottom
spout projection	215 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	yes
with transformer/power supply	no
type of mounting	wall mounting
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	bib tap
Volume flow rate bypass PWH	0.05 l/s
volume flow rate at 3 bar	0.1 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Mandatory Accessories



Power supply unit

2030039477
ACEX9001



Extension cable 5 m

2030043814
ACEX9010



KWC F5E-Therm
Electronic thermostatic wall-mounted mixer for separate power supply

Modell-Linie: F5E | F5ET1005
Taps | Electronic taps

Optional Accessories



**Bidirectional remote control for
electronical fittings F3 and F5**

2030036654
ACEX9005



**2-button remote control for fittings F3
and F5**

2030036849
ACEX9004



**Thermal disinfection unit for F5E-
Therm thermostatic wall mixers**

2030039541
ACET9001



**Electronic module for wash basin taps
F5**


2030041914
ACET1001

Spare Parts




Temperature handle

2030047082
ASXT9003



Temperature stop

2030003296
EAQLT0003



Solenoid valve cartridge

2030045522
ACXX9002