


KWC F5S-Mix
Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1008
Taps | Self closing taps

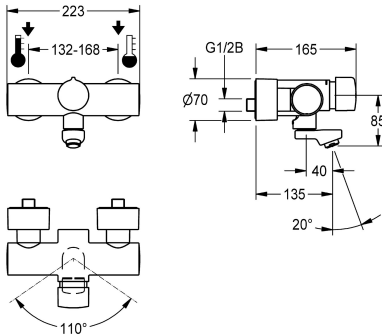

KWC-No.	spout projection	volume flow rate at 3 bar
2030032992 Projection 195 mm	195 mm	0.1 l/s
2030032991 Projection 135 mm	135 mm	0.1 l/s
2030032993 Projection 255 mm	255 mm	0.1 l/s
2030040314 with projection 135 mm and aerator with flow regulator 3.0 l/min	135 mm	0.05 l/s
2030040316 with projection 195 mm and aerator with flow regulator 3.0 l/min	195 mm	0.05 l/s
2030040317 with projection 255 mm and aerator with flow regulator 3.0 l/min	255 mm	0.05 l/s

F5S mix self-closing wall-mounted mixer DN 15 as single-mixer tap for wall mounting with lockable swivelling spout, for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With

adjustable, turn-proof temperature stop. Connects to hot and cold water. All-metal construction, high-polished chromium-plated brass. Aerator with an integrated flow regulator 3.0 l/min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 135 mm.

Technical Data

with backflow preventer	hoses with inner pvc lining
calculation flow rate cold wat	0.07 l/s
calculation flow rate hot water	0.07 l/s
compatible A3000 open	no
depressurised	no
with filter	hoses with inner pvc lining
adjustable flow time	hoses with inner pvc lining
functional principle	hydraulic self-closing
hygiene flushing	no
diameter nominal	DN 15
inlet size	G 1/2 B
Locking mechanism	Top section, ceramic
material fitting	brass-look
maximum flow time	35 Seconds
minimum flow pressure	0.5 bar
minimum flow time	5 Seconds
type of mixing	hoses with inner pvc lining



KWC F5S-Mix
Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1008
Taps | Self closing taps

Pop-up waste set	no
with rosettes/cover plate	hoses with inner pvc lining
protective shutdown	no
sound insulation	no
Spout	rotating, bottom
spout projection	135 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	hoses with inner pvc lining
thermal disinfection	no
type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
volume flow rate at 3 bar	0.05 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Theft-proof housing for aerator

2000104778
ZTAPS0005

Spare Parts



Screw rosette



Mounting set



Handle push cap



Temperature stop



KWC F5S-Mix
Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1008
Taps | Self closing taps

2030046777
ASXX9003



Safety ring

2030048357
ASXX9003



Plug chromed

2030053006
ASXX9004

2030003401
EAQLT0009



FRAMIC self-closing mixing cartridge

2030046185
ASSM9001


2030050753
ASSM9004



3.0 l/min. aerator

2030041424
ASXX1008

2030046189
ASSM9002



Swivel spout, 40 mm

2030049950
ASXX1009