
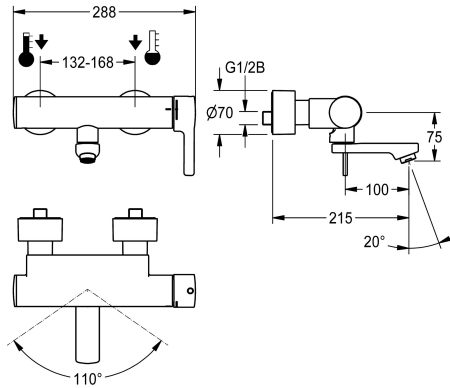


KWC F5L-Therm Thermostatic single-lever wall-mounted mixer

Modell-Linie: F5L | F5LT1005
Taps | Manual taps

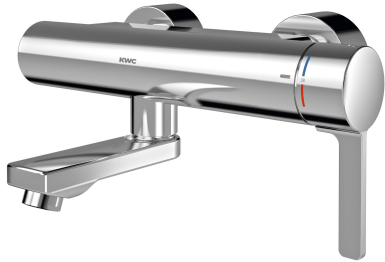

KWC-No.

2030066484

Projection 215 mm

2030066483

Projection 155 mm

2030066486

Projection 275 mm

spout projection

215 mm

155 mm

275 mm

F5L-Therm thermostatic single-lever mixer as DN 15 wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. With mechanism for optional hygiene unit for automatic hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve cartridge

necessary) and storage of statistical data. For connection to hot and cold water. Scald-protection, safe-touch housing, all-metal construction, high-polished chrome-plated brass. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Projection 215 mm.

Technical Data

with backflow preventer

depressurised

with filter

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material fitting

minimum flow pressure

type of mixing

Pop-up waste set

with rosettes/cover plate

protective shutdown

sound insulation

Spout

spout projection

surface finish casing

surface finish fitting

surface treatment fitting

yes

no

yes

manual

prepared

DN 15

G 1/2 B

Top section, ceramic

brass-look

1 bar

with thermostat

no

yes

no

no

rotating, bottom

215 mm

chromed

chromed

polished




KWC F5L-Therm Thermostatic single-lever wall-mounted mixer

Modell-Linie: F5L | F5LT1005
Taps | Manual taps

temperature limit	yes
thermal disinfection	yes
type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
volume flow rate at 3 bar	0.1 l/s
water connection	S-unions
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories

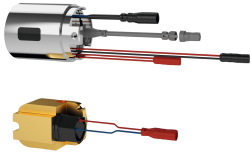

Hygiene unit for F5L single-lever wall mixers


2030039446
ACLM9001



Theft-proof housing for aerator

2000104778
ZTAPS0005

Spare Parts



Swivel spout, 160 mm

2030032815
ASXX1002




Laminar jet regulator

2030012352
ETAPS0037



Mounting set

2030003401
EAQLT0009



Screw rosette

2030046777
ASXX9003