


KWC F4LT-Med Thermostatic single lever mixer

Modell-Linie: F4 | F4LT1024
Kranar | Manuella kranar

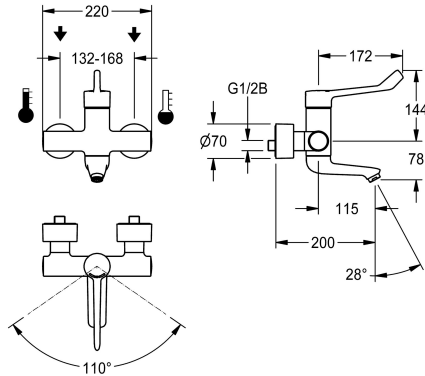

KWC-No.

2030072407

F4LT-Med thermostatic single lever mixer as DN 15 wall-mounted mixer, for wall mounting with lockable swivelling spout, for sanitary facilities in the healthcare and nursing sector, lever length 172 mm. Thermostat-controlled mixer cartridge with expansion element and active scald protection, fail-safe against backflow as well as adjustable, turn-proof temperature stop, ceramic disc technology and flow rate controller 9.0 l/min. Without backflow preventer for optimised drinking water hygiene. Lever cap ergonomically designed in closed construction for contactless lever actuation. For

connecting to hot and cold water. Tap optimised for cleaning, scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Decoupled from the tap housing, volume-reduced, smooth water flow from low-lead brass (lead proportion $\leq 0.2\%$), and without nickel coating. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Self-emptying spout with laminar jet controller. With adjustable and lockable connections with strainers, fully covered by depth-adjustable screw rosettes. 200 mm projection.

Technical Data

ATT-WS-COMPA30000

Nedtryckt

Funktionell princip

Nominell diameter

Inbyggnadsmått

Material delar

Minimalt flödestryck

Typ av blandning

Total bredd

ATT-WS-POPUPWASTESET

ATT-WS-SPOUT

Sprut kastare

Ytfinish hölje

yt finish

ATT-WS-SURTREATFIT

ATT-WS-TEMPERATURELIMIT

Typ av montering

Typ av operation

Typ av kran

ATT-WS-VOLFLOWRATE3

ATT-WS-WATCON

Accentfärg

Basfärg

Nej

Nej

Manual

DN 15

G 1/2 B

Mässing

1 bar

Med termostat

220 mm

Nej

ROTATING-BOT

115 mm

Förkromad

Förkromad

POLISHED

Ja

Väggmontering

Manuell operation

Tvågreppsblandare

0.15 l/s

SUNION

NONE

CHROME-GLOSSY

