


KWC F4ET-Med  
Thermostatic wall-mounted mixer

Modell-Linie: F4 | F4ET1001  
Taps | Electronic taps

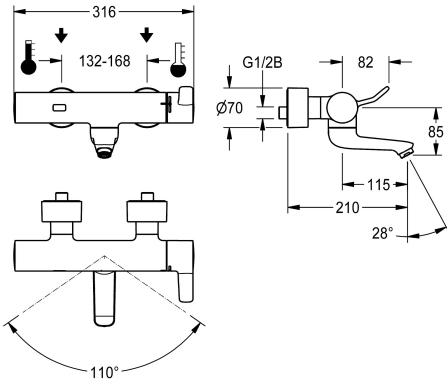

KWC-No.

2030072424


F4ET-Med thermostatic wall-mounted mixer as DN 15 wall-mounted mixer, for wall mounting with lockable swivelling spout, for sanitary facilities in the healthcare and nursing sector. Opto-electronically controlled, triggered by hand movement with subsequent automatic switching to body detection. Thermostat with metal handle, including lever for reduced-touch operation, and adjustable, turn-proof temperature stop. With the option of manual thermal disinfection. For connecting to hot and cold water. Control electronics, stagnation-free hygiene solenoid valve cartridge, flow rate controller 9.0 l/min, 6 V lithium battery (CR-P2) and sensor in the scald-protected safe-touch housing, polished chromium-plated

brass. Decoupled from the tap housing, volume-reduced, smooth water flow from low-lead brass (lead proportion  $\leq 0.2\%$ ), and without nickel coating. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Self-emptying spout with laminar jet controller. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 210 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With option for parametrisation and communication via optional, bidirectional remote control.

Technical Data

|                                |
|--------------------------------|
| with backflow preventer        |
| compatible A3000 open          |
| default automatic hygiene flus |
| depressurised                  |
| with filter                    |
| adjustable flow time           |
| functional principle           |
| hygiene flushing               |
| diameter nominal               |
| inlet size                     |
| Locking mechanism              |
| material fitting               |
| maximum flow time              |
| minimum flow pressure          |
| minimum flow time              |
| type of mixing                 |
| number of batteries            |
| overall depth                  |
| overall width                  |
| Parameterization               |
| Pop-up waste set               |
| power supply connection        |

|                             |
|-----------------------------|
| yes                         |
| no                          |
| 24h after the last activity |
| no                          |
| yes                         |
| yes                         |
| electronic self-closing     |
| yes                         |
| DN 15                       |
| G 1/2 B                     |
| Top section, non-ceramic    |
| brass-look                  |
| 255 Seconds                 |
| 1 bar                       |
| 1 Seconds                   |
| with thermostat             |
| 1                           |
| 210 mm                      |
| 316 mm                      |
| remote control              |
| no                          |
| Battery 6 V                 |



KWC F4ET-Med  
Thermostatic wall-mounted mixer

Modell-Linie: F4 | F4ET1001  
Taps | Electronic taps

|                               |                          |
|-------------------------------|--------------------------|
| Type of power supply          | Battery                  |
| protective system IP          | IP59K                    |
| with rosettes/cover plate     | yes                      |
| protective shutdown           | yes                      |
| Spout                         | rotating, bottom         |
| spout projection              | 115 mm                   |
| surface finish fitting        | chromed                  |
| surface treatment fitting     | polished                 |
| temperature limit             | yes                      |
| thermal disinfection          | manual                   |
| with transformer/power supply | no                       |
| type of batteries             | CR-P2 Lithium battery 6V |
| type of mounting              | wall mounting            |
| type of operation             | sensor operation         |
| type of sensor                | opto-electronic sensor   |
| type of tap                   | bib tap                  |
| volume flow rate at 3 bar     | 0.15 l/s                 |
| water connection              | S-connections            |
| Accent colour                 | none                     |
| Basic colour                  | chrome-look (glossy)     |

Optional Accessories




Bidirectional remote control for  
electronical fittings F3 and F5

2030036654  
ACEX9005



2-button remote control for fittings F3  
and F5

2030036849  
ACEX9004



Aerator

2030071309  
ASXX1042

Spare Parts



**KWC F4ET-Med**  
Thermostatic wall-mounted mixer

**Modell-Linie: F4 | F4ET1001**  
Taps | Electronic taps



**Battery compartment**

**3600002063**  
ACEX9023




**Lithium battery 6 V**

**2000104846**  
EPRTR0008



**F5 Foil**

**2030053034**  
ASET2010



**Temperature stop**

**2030003296**  
EAQLT0003



**Cover**

**2030003258**  
EAQLT0002