


KWC PLANOX

Tvättställsenhet med väggmonterad elektronisk ventil

Modell-Linie: PLANOX | PL6UEV
Tvättställ | Tvättränna

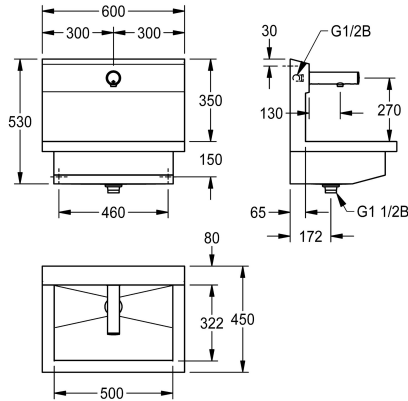

KWC-No.

360004027

med en tvättplats
Mått 600 x 530 x 440 mm (B x H x D)

PLANOX washbasin unit with seamless welded trough, one wash place, suitable for wall mounting, for connection to premixed hot water or cold water from the rear right or left. Stainless steel housing, satin finish, material thickness 1.5 mm. Centre waste, G 1 1/2 B flat perforated waste, including mounting material. Ready for connection, with mounted F3E electronic bibtap, opto-electronically controlled, control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished

chromium-plated brass. Aerator with integrated flow rate controller 6.0 l/min. Activated hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. Parameterisation and communication possible via optional bidirectional remote control.

Dimensions 600 x 530 x 440 mm (W x H x D)
Wash place width 600 mm

NEW

Technical Data

Material
Materialkod
Antal avloppshål
Total bredd
Bakre stående
Utslagsback
Ytfinish
Typ av montering
Typ av avfallsbehållare
Avfalls håls placering
avfallsbehållare ingår

Rostfritt stål
1.4301
1
600 mm
Nej
Ja
Satin yta
Väggmontering
Perforerad avloppsil
Mitten
Ja

Extratillbehör



KWC PLANOX

Tvättställsenhet med väggmonterad elektronisk ventil

Modell-Linie: PLANOX | PL6UEV
Tvättställ | Tvättränna

**Bidirectional remote control for
electronical fittings F3 and F5**

2030036654
ACEX9005

**2-button remote control for fittings F3
and F5**

2030036849
ACEX9004


Stainless steel care set

2000109019
ZWSPL0024

Trap

2000101371
E-RNDX-SIPHON

Reservdelar



Solenoid valve cartridge

2030045522
ACXX9002



3.0 l/min. aerator

2030041424
ASXX1008



Cleaning product CHROMOL

2000105091
ZWSPL0023