
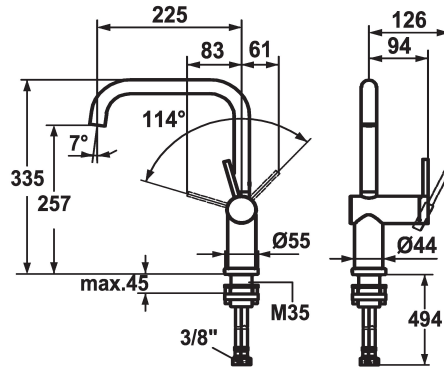


## KWC LIVELLO

Lever mixer - Kitchen - detachable

Modell-Linie: LIVELLO | 10.231.043.700FL

Taps | Manual taps

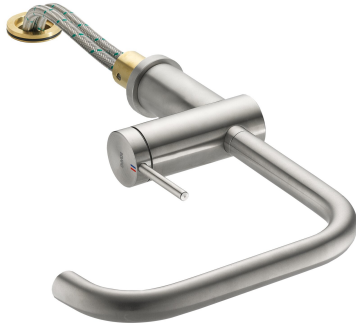

### KWC-No.

**123115**

stainless steel, A 225, flexible connection hoses

\* Lever mixer

\* Detachable for installation below windows - detached 55 mm

\* Lever installation only possible on the right side

- Child safety: cold water flow in lever position towards the front

\* gap between wall and centre of mounting hole min. 65 mm

\* Intrinsicly safe against backflow

\* Swivel spout 125°, extensible to 360°

- Neoperl® Caché®

\* OptimalSpace - ample space for washing or working

\* KWC cartridge M 35 H

- with ceramic discs

- flow rate and temperature continuously variable

\* Flexible connection hoses 3/8"

\* Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)

\* Mounting hole size ø35 - 37 mm

### Technical Data

Flow rate	12 l/min (3 bar)
Connection	Flexible connection hoses
Spout	swivel
Detachable	detachable
Handling	side lever
Color code	stainless steel
Installation type	Pillar installation
Faucet_typ	Lever mixer
Design	L-Spout
Measure Height	335
Acoustic group	II
Projection A	A 225
Energy label	C
Dimension Water outlet	257
material	Brass

Flow rate	12 l/min (3 bar)
Connection	Flexible connection hoses
Spout	swivel
Detachable	detachable
Handling	side lever
Color code	stainless steel
Installation type	Pillar installation
Faucet_typ	Lever mixer
Design	L-Spout
Measure Height	335
Acoustic group	II
Projection A	A 225
Energy label	C
Dimension Water outlet	257
material	Brass



### Spare Parts

## KWC LIVELLO

Lever mixer - Kitchen - detachable

Modell-Linie: LIVELLO | 10.231.043.700FL  
Taps | Manual taps



**Cartridge M 35 H**

**538327**  
Z.537.582



**Service key Neoperl © Caché ©, JR, 21 mm, red**

**639017**  
Z.635.215