
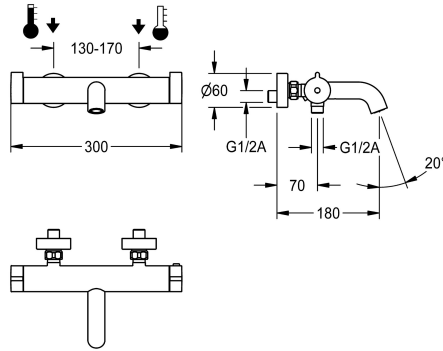


## KWC F4MT-Med Thermostat bath mixer

Modell-Linie: F4 | F4MT2001  
Showers | Manual shower

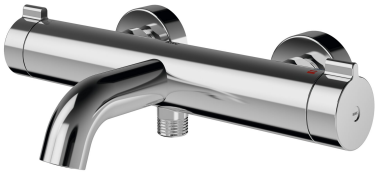

### KWC-No.

**360000189**

F4MT-Med thermostat bath mixer with fixed spout as a two-handle wall-mounted mixer DN 15, fitting group I, for wall mounting for baths in the healthcare and nursing sector, for connecting to hot and cold water. Ceramic valve cartridge with rotary handle for flow regulation, mixer water shut-off, as well as integrated diverter for bathtub and hand shower. Thermostat-controlled mixer cartridge with expansion element and active scald protection, fail-safe against backflow as well as adjustable, turn-proof temperature stop, preset to 38 °C and option to carry out manual thermal

disinfection. Tap optimised for cleaning with ergonomically designed handles, scald-protected safe-touch housing with hand shower connection 13 l/min, G 1/2 B, bath spout with laminar jet controller 20 l/min and backflow preventer. All-metal construction, high-polished chrome-plated. Double-walled tap housing for reducing the heat transfer from the tap housing to the cold water line, with volume-reduced and smooth water lines. With adjustable connections with strainers, fully covered by depth-adjustable screw rosettes. 180 mm bath spout projection.

### Technical Data

circulation	no
compatible A3000 open	no
connection with pay water disp	not possible
adjustable flow time	no
functional principle	manual
for hand shower	yes
hygiene flushing	no
diameter nominal	DN 15
inlet size	DN 15
Locking mechanism	Top section, ceramic
type of mixing	with thermostat
shower pipe draining	no
with shower set	no
surface finish casing	chromed
temperature limit	yes
thermal disinfection	manual thermal disinfection
type of mounting	wall mounting
type of operation	manual operation
type of shower	wall fitting
water connection	S-unions
position of water connection	from backside
with soap dish	no

circulation	no
compatible A3000 open	no
connection with pay water disp	not possible
adjustable flow time	no
functional principle	manual
for hand shower	yes
hygiene flushing	no
diameter nominal	DN 15
inlet size	DN 15
Locking mechanism	Top section, ceramic
type of mixing	with thermostat
shower pipe draining	no
with shower set	no
surface finish casing	chromed
temperature limit	yes
thermal disinfection	manual thermal disinfection
type of mounting	wall mounting
type of operation	manual operation
type of shower	wall fitting
water connection	S-unions
position of water connection	from backside
with soap dish	no



## KWC F4MT-Med Thermostat bath mixer

Modell-Linie: F4 | F4MT2001  
Showers | Manual shower

### Optional Accessories



Hand shower

---

**2030051216**  
ACXX2007

---



Shower bracket

---

**2030051217**  
ACXX2008

---

### Spare Parts



Service key Neoperl © Caché ©, STD,  
24 mm, grey

---

**635231**  
Z.635.231

---